

always by your side

SeaSight®

SeaSight®

SEASIGHT Medical Instruments

always by your side

NINGBO SEASIGHT MEDICAL INSTRUMENTS CO., LTD.

Office Add: 9F, Ningshing Building, No.666 Jiangnan Road, Ningbo, China.

Factory Add : No.508, Yindong Road(N), Yinzhou Economic
Development Zone, Ningbo315145, China

Tel: 0086-574-81877107 Fax: 0086-574-81877057
<http://www.seasight-med.com>





Contents



Diagnostics Series P01~14



Examination Series P15~23

Weighing Series P24~26

Rehabilitation Series P27~38

Outdoor Series P39~44

Hospital facility Series P45~55

Hospital e Equipment Series P56~74

Model Series P75~80



ABOUT US

OUR COMPANY



Establishment

SEASIGHT is established in the year 2003 as a professional manufacturer and supplier for medical and lab products in China. Our 1st factory- MFLAB Medical with production area 15,500 m2. It includes 100000 grade purification workshops and cleaning rooms, totally 9,200 m2. Our 2nd Factory-SEASIGHT Medical (production area covering 52,000 m2) will open soon.

Team Work

SEASIGHT has a high efficient and professional team, full of wisdom and passion, with more than 20 years of working experience. We take the diligent, professional and responsible spirit, committed to provide customers good products and service.

Export Reputation

Our SEASIGHT products have been exported to over 150 countries worldwide through a network of distributors and subsidiaries, covering North American, South American, European, Asian and African countries.

Leading Products

SEASIGHT has a wide range of products in business with leading products respiratory products, disposable medical products, medical equipment and laboratory products. We can supply clients with OEM or ODM or OBM.

Brands

There are Seven brands in our group: Seasight, Sunflos, Medland Care, Foyocare, Foyomed, FoyoLab and Mflab in distribution.

Quality System

Our factory MFLAB Medical audited by TUV Rheinland every year, more than 40 products has got CE certificates issued by TUV Rheinland, and also passed by GMP, ISO13485, US FDA on-site Audit, Saudi Arabian FDA on-site Audit, Malaysian MOH on-site Audit, and Korea MOH on-site Audit. We have also got a number of patents.

Principle

We SEASIGHT adheres to "Always by your side" principle to strive to achieve excellent quality, competitive price and first-rate service in operation, and cherish every business opportunity.

Diagnositics Series

always by your side

Aneroid Sphygmomanometer

300mmHg Gauge
Cotton or Nylon Cuff
With or Without D-Ring is Available
Artery Label
Vinyl or Nylon Zippered Carrying Case



SHD1101

Aneroid Aphygmomanometer
With Separate Single Head Stethoscope
Euro Type
Cuff: Nylon D ring 18x14cm
PVC Bladder/Bulb
Bag: Nylon



SHD 1102

Arm Type
Cuff: Nylon D ring 50x14cm
PVC Bladder/Bulb
Bag: Nylon



SHD1103

Palm Type Aneroid Sphygmomanometer
ABS Plastic cover chromeplate $\Phi 67$ mm
Cuff: Nylon D ring 48x14cm
PVC Bladder/Bulb
Bag: Nylon



SHD1104

ABS Plastic cover chromeplate $\Phi 51$ mm
Cuff: Nylon D ring 48x14cm
PVC Bladder/Bulb
Bag: Nylon



SHD1105

Zinc Alloy cover chromeplate $\Phi 68\text{mm}$
Rotary handle and gauge
Fast air release valve
Fast speed connector
Cuff: Nylon D ring 48x14cm
PVC Bladder/Bulb
Bag: Nylon



SHD1106

ABS Plastic case
Nylon Case
PVC Color Bulb
O.D. of Gauge: $\Phi 63\text{mm}$
Fluorescent Surface



SHD1107

ABS Plastic case
Nylon Case
PVC Color Bulb
P.D. of Gauge: $\Phi 69\text{mm}$



SHD1108

Clock-Type



SHD1109

Desk Type



SHD1110

Floor Type
Aneroid Sphygmomanometer
Clock-type Aneroid Sphygmomanometer with stand.
Two-piece stand column, easily
Adjustable from 80 to 125cm, 5pcs castors with brakes,
individual packed in foam box.

Mercury-Free Sphygmomanometer

Specification:

Measure unit: mmHg
 Numerical display: 1 mmHg
 Measure method: stethoscope
 Measure scope: 0-300mmHg
 Available discrepancy: +/-3mmHg
 Pulse rate: 30-200m, +/-5%
 Pressurization: manual by bulb
 Depressurization: Manual by air release valve
 W/O D-ring nylon cuff with silk printing
 PVC bladder and bulb



SHD1121

Minimal scale:LCD column:2mmHg
 Power supply:4.5V,AA*3
 1 pc in a gift two-piece gift box



SHD1122

Minimal scale:LED column:2mmHg
 Power supply:4.5V,AA*3
 1 pc in a gift two-piece gift box



SHD1123

Minimal scale:LCD column:2mmHg
 Power supply:4.5V,AA*3
 1 pc in a gift two-piece gift box



SHD1131

Minimal scale:LCD column:2mmHg
 Power supply:3V,AA*2
 Steel tube,spring tube 2m
 Iron base plate with 5 castors with brakes
 Adjustable from 105cm to 146cm

Accessories



SHD1160
Zipper Case



SHD1161
Cuff



SHD1162
Bladder



SHD1163
Bulb



SHD1164
Air-release Valve



SHD1165
End Valve



SHD1166
Cuff
Material: Nylon or cotton

Fully Automatic Electronic Blood Pressure Monitor



Wrist Type



Arm Type

SHD1151

LCD Display 80x23mm
21 sets including blood pressure, pulse rate, date, time
Measurement Range: 0 - 300mmHg
40 - 200 Pulse/min(pulse)
Battery: AAA*4

SHD1152

Extra large LCD display and back light
Five language voice adjustable(E. F. R.G.S)
Voice volume adjustable
Two users with 90 sets of memory each
Average for the latest 3 reading

SHD1153

Backlighting in 3 different colors
Intelligent inflation
Universal Cuff 22 -42cm
LCD Backlight display
90 sets of memory
Battery: AAA*4



SHD1141

LCD Display 35x48mm
7 sets including blood pressure, pulse rate, date, time
Measurement Range: 0 - 300mmHg
40 - 200Pulse/min(pulse)
Battery: AAA*2



SHD1142

Large LCD display with bold type
90 sets of memories



SHD1143

Large LCD Display
Five language voice adjustable(E. F. R.G.S)
Voice volume adjustable
Two users with 90 sets of memory each
Automatic power off after 3 minutes of no operation



Single Head Stethoscope

Oxided or Anodized Aluminum chest
Brass Chrome Plated Binaural
Plastic eartips
All kinds of color available for the tube such as:
Black, Red, Green, Yellow, Blue, Purple, Pink,
Grey, White, etc.



SHD1202

Single head stethoscope
Sliver chest piece



SHD1201

Single head stethoscope
Colored chest piece



SHD1203

Single head stethoscope
Colored chest piece & Binural




SHD1204

Single head stethoscope
with plastic ring



Stethoscope

1. Material of chest piece:
Zinc Alloy, aluminum Alloy, Stainless steel
2. Material of earloop: Copper, Aluminum, Stainless steel.
3. Material of earplug: PVC, ABS
4. Material of tube: PVC.
5. Any color of tube is available.

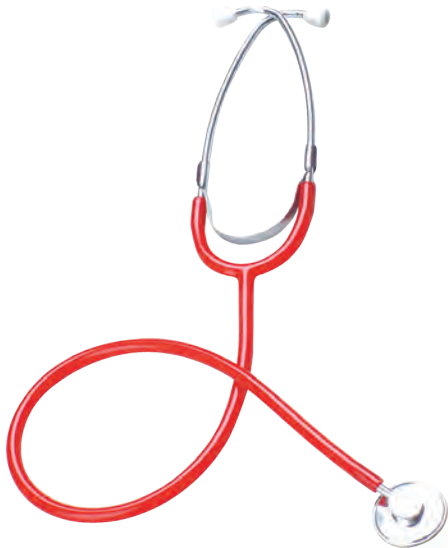

SHD1206

Pediatric
single head stethoscope



SHD1207

Bowles stethoscope
Chrome plated chest piece



SHD1205

single head stethoscope
Zinc alloy chest piece
with chrome plated silver finish
Deluxe Special



SHD1208

Disposable Single head stethoscope
Plastic



Dual Head Stethoscope

Oxided or Anodized aluminum chest piece
Brass chrome plated binaural
Plastic or soft eartips
All kinds of color available for the such as:
Black, Red, Green, Yellow,
Blue, Purple, Pink,
Grey, White,
etc.



SHD1215

Neonatal
Dual Head Stethoscope



SHD1216

Dual head stethoscope
with non-chill ring with soft eartips



SHD1217

Dual head stethoscope with non-chill ring
with soft eartips



SHD1210

Dual head stethoscope
Colored chest piece



SHD1211

Dual head stethoscope
Colored chest piece & Binaural



SHD1212

Sliver chest piece



SHD1213

Pediatric
Dual Head Stethoscope



SHD1214

Teaching use
dual head stethoscope

Stainless Steel Stethoscope

Stainless steel chest piece
Stainless steel Binaural
Plastic & Soft earips
With non-chill rings
Spare diaphragm included
All kinds of color available for the such as:
Black, Red, Green, Yellow, Blue, Purple,
Pink, Grey, White, etc.



SHD1218

Stainless steel stethoscope

SHD1219

Stainless steel stethoscope
cardiology type



SHD1221

Stainless steel stethoscope
Child type



SHD1220

Stainless steel stethoscope
Adult type ingle-lumen tubing



SHD1231

Master Cardiology Stethoscope
Specification:
Application: Cardiology/excellent performance.
Product weight/length: 215g/71cm
Chest piece material:stainless steel,
surface treatment: manual polish
Diaphragm:Φ44mm, Type: floating diaphragm
Binaural material: stainless steel, Φ6mm
Eartip material: silicone, structure: Soft sealing structure
Accessory box: 2 sets silicone ear tips
Package Content: 1pc/box, 12pcs/ctn, 580x400x245mm

Sprague Rappaport Stethoscope

SHD1232

Sprague Rappaport type chest piece
Brass chrome plated binaural
Plastic or soft eartips
All kinds of color available for the such as:
Black, Red, Green, Yellow, Blue, Purple,
Pink, Grey, White, etc.
2sets of earplug, 1set of mebrane
1pc of large chest piece
1pc of middle chest piece
1pc of small chest piece



SHD1233

Fetal Stethoscope
Metal Type

Accessories

SHD1240



SHD1241

Earplug

Examination Series

always by your side



SHD1301

Buck Neurological Hammer

Hammerhead: zinc alloy with rubber plug
Handle: Nylon
With needle: Zinc alloy, with brush
Length of hammer: 22.5cm
Height of hammer head: 8.5cm



SHD1302

Gear Wheel Hammer

Hammerhead: Zinc Alloy
Handle: Zinc Alloy



SHD1303

Taylor Hammer

Length of Handle: 18cm
Size of Runner Plug: 5 x 4.3 x 1cm
Thickness of Rubber Plug: 1.5cm

SHD1304

Gristletly Hammer

Rubber Plug
Hammerhead: copper
Handle: steel
Length of hammer: 24cm
Diameter of hammerhead: 4.5cm

SHD1305

Babinski(Adult) with Telescoping Handle

Hammerhead: Zinc alloy with rubber plug
Handle : Zinc Alloy
Length of handle: 21cm
Diameter of hammerhead: 4.5cm
Thickness: 1cm

SHD1306

Colorflex Reflex Hammer

Hammerhead: rubber with copper ring
Handle: Nylon
Length of hammer: 22.5cm
Height of hammerhead: 7.5cm





SHD1401

Diagnostic Pen Light



SHD1402

Diagnostic Pen Light



SHD1502

Integrated Diagnostic System

Fiber Optic Otoscope
Direct Ophthalmoscope
Tip Dispenser(with disposable tips)
Infrared thermometer
Insufflation Bulb
Sphygmomanometer
Customize your wall set to
match your individual needs



SHD1501

Chargeable Diagnostic Series

Specification:

1. One chargeable Otoscope & Ophthalmoscope
2. Single Charger
3. Gift box

HS-OTP10C-2

Specification:

1. One chargeable Otoscope & Ophthalmoscope
2. Double Charger
3. Gift box



SHD1503

ENT Kit

Ophthalmoscope	1
Otoscope carrier	1
Ear specula(3,4,5,6mm diam)	4
Nasal speculum(8mm diam)	
Dilating Nasal speculum	1
Laryngeal mirror	3
Tongue depressor plastic	1
Battery handle	1
Spare Bulbs(2large, 4small)	6



SHD1505

Otoscope

Deluxe packing:
Penlight, Part of otoscope, batteries



SHD1507

Buck Neurological Hammer

Gear wheel hammer
Taylor Hammer
Gristlet hammer



SHD1504

Professional Otoscope


Features:
Fiberoptics for cool, obstruction free light transmission
Otoscope head made from polymid - an impact resistant space age thermoplastic
Swivelling viewing window with 2.5x magnification
"AA" polycarbonate battery handle interchanges pocket clip with integral on/off slide switch for ambidextrous use
Technical Data
Magnification: 2.5x
Distal dia.: 2.5mm, 4mm
Bulb: 2.5V 1.6W halogen lamp
Batteries: two "AA" Batteries or two "AA" NiMH Rechargeable Battery



SHD1506

Reflex Hammer Gifts Set

Buck Neurological Hammer
Babinski with telescoping handle
Taylor Hammer

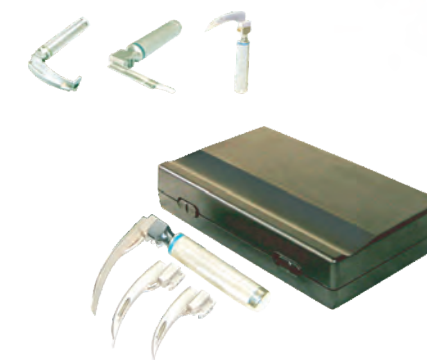


SHD1508

Fiber Laryngeal Mitrror

Power supply: 1.5V X 2 "C" Type
Bulb: 2.5V/0.35A
Blades: 92, 114, 134mm



LCD Backlight



Unit Switchable



Non-contact Infrared



Beep Alarm



20 Memories



1s Fast Reading

LED color Indicator

Green : Temperature < 37.5°C / 99.5°F
Red : Temperature ≥ 37.5°C

SHD1601

Infrared Non-contact Thermometer

Two-color (red, green) display alarm
Green Backlight Display
Automatic Detection Button
Subject and object modes between fast handover
Memory in 20 groups
The default unit is C (and are switching)
Low battery indication
Automatically power off after 15 seconds
Power from 2 alkaline batteries
Measurement range:
Body style: 32 ~43 (89.6~109.4)
Object mode: 0 ~100 (32 ~212)
Measurement accuracy:
Body style: 36 to 39 degrees C (96.8/102.2 degrees female) +/- 0.2 degrees C (+/- 0.4)
32 to 35.9 degrees C (93.2/96.6 degrees female) and 39.1 to 43 degrees C (109.4 degrees female)+/0.3 degrees (+/0.5)
Object mode: 0 ~100 (32~212)+/1 (+/2)
Body style: 16 -40 (60.8-104)



Digital Thermometer



SHD1701

Specification:
waterproof (Test Method: located at least 15 cm below surface of water for 30 min).
Flexible tip.
10 seconds.
Beeper & fever alarm
Last readout recall
automatic switch-off
low battery indication
accuracy ±0.1°C(35.5°C-42.0°C).
Battery:1.5V(LR/SR41).

SHD1602

Infrared Thermometer

Range of displayed temperature: 32.0°C - 42.9°C(89.6°F - 109.2°F)
Ambient temperature operating range: 10°C-40°C(50°F - 104°F)
Storage temperature range: -25°C -55°C(-13°F -131°F)
Digital increment: 0.1°C/0.1°F
Maximum permissible error:
±0.2°C/0.4°F 35.5 - 42.0°C(95.9°F -107.8°F)
±0.3°C/0.5°F 32.0 - 35.4°C(89.6°F -95.7°F)
±0.3°C/0.5°F 42.1 - 42.9°C(107.8°F -109.8°F)



SHD1603

Infrared Ear Thermometer

3-Digital
Scale: °C or °F
Accuracy: ±0.2°C(±0.4 °F)
Min Scale: 0.1 °C
Memory function: 10 group
Measuring times: 1 second
Beeper function
Auto SHRt-off



Button

TPE



SHD1702

Specification:
Transparent.
60 seconds.
Beeper & fever alarm
Last readout recall
automatic switch-off
low battery indication
accuracy ±0.1°C (35.5°C-42.0°C) .
Battery:1.5V(LR/SR41).

SHD1703

waterproof (Test Method: located at least 15 cm below surface of water for 30 min)
Backlight
Jumbo LCD: 33.50X16.0 mm
Beeper & fever alarm
Last readout recall
automatic switch-of
low battery indication
accuracy ±0.1°C(35.5°C-42.0°C)
Battery:3.0V(CR2032)



SHD1704

Specification:
10 seconds
Beeper & fever alarm
Last readout recall
automatic switch-of
low battery indication
accuracy $\pm 0.1^{\circ}\text{C}$ (35.5°C - 42.0°C).
Battery: 1.5V(LR/SR41).



SHD1705

waterproof
flexible tip.
10 seconds.
Beeper & fever alarm
Last readout recall
automatic switch-of
low battery indication
accuracy $\pm 0.1^{\circ}\text{C}$ (35.5°C - 42.0°C).
Battery: 1.5V(LR/SR41).

Thermometer Clinical Thermometer

Glass
Scale: $^{\circ}\text{C}$, $^{\circ}\text{C}$ & $^{\circ}\text{F}$
Accuracy: $\pm 0.1^{\circ}\text{C}$ ($\pm 0.2^{\circ}\text{F}$)
White back, Yellow back or Blue Back



SHD1721

Armpit Use, Large Size



SHD1722

Armpit use, Middle Size



SHD1723 Air Thermometer



SHD1724 Bath Thermometer



SHD1725

Bay Pacifier

Digital Thermometer(Waterproof)
Display range: $32.0 - 42.0^{\circ}\text{C}$ / $90.0 - 107.6^{\circ}\text{F}$
Accuracy: $\pm 0.1^{\circ}\text{C}$ / $\pm 0.2^{\circ}\text{F}$
Min. Scale: 0.1
Memory: Last measurement reading
Measurement time(Reference only,
it differs from people(to people): 2min
Beeper function
Auto SHRT-off
Battery: 1.5V button battery(LR/SR-41)
Size: 62 x 46 x 50mm
LCD: 15 X 6mm
N.W.: 13G
Memory: last measuring reading



SHD1726

Alcohol Tester

Advanced NM Hot-wire alcohol sensor
Quick Response
SMD Assembling, Stable performance
Smart MCU control
Direct testing process LCD Indication
Portable design
No touch health Design
Audio and visible warning beyond preset level
Battery saving design, low voltage indication



SHD1706

Large LCD display
Display range: $32.0^{\circ}\text{C} \sim 42.0^{\circ}\text{C}$
 $89.6^{\circ}\text{F} \sim 107.6^{\circ}\text{F}$
Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{C}$
Min scale: 0.1°C / 0.1°F
Response: 60seconds
Size: 121 x 17 x 10mm
LCD: 20 x 7.5mm
N.W.: 9.5g



SHD1707

Flexible Probe
Water-proof
Large LCD Display
Display Range: $32^{\circ}\text{C} - 42^{\circ}\text{F}$
 $89.6^{\circ}\text{F} - 107.6^{\circ}\text{F}$
Accuracy: $\pm 0.1^{\circ}\text{C}$, $\pm 0.2^{\circ}\text{F}$
Min Scale: 0.1°C / 0.1°F
Response: 60seconds
Size: 126 x 18 x 10mm
LCD: 20 x 7mm
N.W.: 11.5g



SHD1901

Height Measuring Rod

Height range to be measured: 0-2000mm
Min value of height per division: 1mm
Measurement: 35.5×19×19cm /20pc
G.W.: 4kg N.W.: 3.6kg



SHD1902

Luxurious Eyesight Lamp box

This is served as an apparatus for enghtsight examination in hospitals
In practical in hospitals
Soft and comfortable lighting levels and being made of aluminum materials, it has a very handsome appearance
There are three styles available-desktop style, wall style and hanging style
Main Technical data:
Power Voltage: AC 220V±10%
Frequency: 50Hz
Power: 60W



SHD1903

Operation Reflector Lamp

Stainless haulm,
Hose flexible lift type, unbending rise or drop
Voltage: AC 220V
Frequency: 50Hz
Power: 60W



SHW1101

Electronic Infant Scale

Max. Weight: 20kg



SHW1102

Baby Scale

Max. Weighing: 20kg



SHW1103

Electronic Infant Scale

Max. Weight: 20kg
Min. Value per division: 50g



SHW1104

Baby Scale

Max. Weighing: 25kg



SHW1105

Baby Scale

Tray Size: 56x28x9.3cm
Body Size: 36x29.5x7.5cm
Net Size: 56x31.5x13.5cm
Max. Weight: 30kg
Graduation: 5g
LCD Display, Auto Power off,
Low battery indicator, 1 loadcell
Precision: ±1%
Displayed In two units: KG/LB/OZ
Batteries: 4X AA(not included)
LCD Size: 7 x 2.8cm

Bathroom Scale



SHW1201



SHW1202



SHW1203



SHW1204



SHW1205



SHW1206



SHW1301

Health Scale

Max. Weighing: 120kg



SHW1302

Health Scale

Max. Weighing: 200kg

SHW1303

Electronic Body Scale

Max. Weight: 200kg
Division: 100g
Display: LED Power: AC/DC
Height range to be measured: 800 - 2100mm
Min value of height per division: 5mm
G.W.: 15KG N.W.: 13kg
Measurement: 100x32x26cm



Rehabilitation Series

always by your side



SHR1201












SHR1202



SHR1203

MAIN PARAMETERS

MEASUREMENTS(cm) MODEL NO.							 (Kg)	 DIM	 NW/GW
SHR1201	64	46	58	20	49	87	100	94X23X89	16.7 19
SHR1202	64	46	58	17	48	88	100	92X28X89	15.3 16.5
SHR1203	65	46	58	20	51	119	100	98X35X89	27.7 29.7



SHR1204



SHR1205



SHR1206



SHR1207












SHR1209












SHR1208

MAIN PARAMETERS

MEASUREMENTS(cm) MODEL NO.							 (Kg)	 DIM	 NW/GW
SHR1204	65	46	62	20	51	88	100	80x28x89	19.3 22
SHR1205	52	35	58	15	48	93	75	85x33x73	13 15.5
SHR1206	64	44	58	20	53	129	100	107x33x78	25.6 29.3

MAIN PARAMETERS

MEASUREMENTS(cm) MODEL NO.							 (Kg)	 DIM	 NW/GW
SHR1209	38	32	15	10	45	84	100	39x29x70	6 7.5
SHR1207	61	46	51	15	49	92	100	82x28x76	11.7 13.7
SHR1208	61	46	56	17.5	49	58	100	90x27x91	11.8 14.1












SHR1210



SHR1211

MAIN PARAMETERS

MEASUREMENTS(cm) MODEL NO.							 (Kg)	 DIM	 NW/GW
SHR1210	52	38-44	38	15	49	96-114	75	77x40x95	21.4 24.3
SHR1211	52	38-44	40	15	48	97-116	72	84x40x95	18.3 21




















SHR1212



SHR1213

MAIN PARAMETERS

MEASUREMENTS(cm) MODEL NO.																	
SHR1212	63	46	32	20	50	91	20	1~7	28AH	200Wx2	4°	12°	100	80x40x76	59.7	66.2	
SHR1213	64	46	32	20	55	97	20	1~7	28AH	200Wx2	4°	12°	100	78x68x69	62.8	70.8	



SHR1301



SHR1302



SHR1303

















SHR1304



SHR1305

MAIN PARAMETERS

MODEL NO.																																																																																																												
-----------	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	--	--	--	--	--	--	--	--	--	--	--	--

WALKER

Commode Chair-Without Wheel



SHR1401



SHR1402

MAIN PARAMETERS

Item Code									PCS CN	G.W (kg)
SHR1401	56	46	41-51	74-84	40	33	6	60X32X48	2	13.4
SHR1402	41	38	40	—	40	—	1.6	75X30X40	6	10.7

STICK



SHR1501



SHR1502



SHR1503



SHR1504



SHR1505

MAIN PARAMETERS

MODEL Number	HEIGHT (cm)	N.W. (Kg)		PCS CN	G.W. (Kg)
SHR1501(L)	128-148	0.9	132x33x29	20	19
SHR1501(M)	116-136	0.85	119x33x29	20	18
SHR1501(S)	103-123	0.8	103x33x29	20	17
SHR1505	82-92	0.3	64x29x16	20	7
SHR1502	77.5-100	0.3	79x29x18	20	7
SHR1504	120	0.3	35x20x26	40	13
SHR1503	77.5-100	0.35	79x34x19	20	8

SHR1508



SHR1506



SHR1507

SHR1509



SHR1511



SHR1510



SHR1512

MAIN PARAMETERS

MODEL Number	HEIGHT (cm)	N.W. (Kg)		PCS CN	G.W. (Kg)
SHR1506	89	0.3	94x28x15	20	7
SHR1510	72. 5-95	0.9	79x34x43	10	10
SHR1511	72. 5-95	0.9	60x28x47	10	10
SHR1509	65-87. 5	0.8	79x34x43	10	9
SHR1508	68. 5-91	0.3	65x28x15	20	7
SHR1507	68. 5-91	0.3	65x28x15	20	7
SHR1512	80-102. 5	0.9	60x28x47	10	10



SHD201001

PE Material, 1000cc
Size: 32 x 21 x 10cm
60g



SHD201002

PP Material
Size: 36.5 x 28 x 10.6cm
180g



SHD201003

PE Material
Size: 34 x 26.5 x 9cm
300g



SHD201301

PP Material
Size: 25 x 10 x 4.9cm
25g



SHD201302

PP Material
Size: 1000ml



SHD201303

PP Material
Size: 1000ml



SHD201304

PP Material
Size: 1000ml



SHD201101

News Papper
Size: 25.5 x 11.5 x 11cm



SHD201102

News Papper
Size: 25 x 11 x 10.8cm



SHD201103

News Papper
Size: 26 x 10 x 4.9cm
23g



SHD201411



SHD201412



SHD201413



SHD201414



SHD201204



SHD201205



SHD201206



SHD201401



SHD201402



SHD201403

OUTDOOR Series

always by your side




SHU1601 Tractor For Neck Ache

Designer for treating and preventing neck fractured is location of vertebra. Protrusion of the intervertebral disc and excessive stretch and draw. It can support the patient's head efficiently depending on appropriate air pressure, so that it can release the neck and shoulder burden. Also it has the magetic infrared treatment function to dispel the pain.



SHU1602 Cervical Collar

Macromolecule Foam Materials, light



SHU1603 Cervical Collar

Size: S.M.L



SHE1303 A Cervical Collar

Unfolded Size(LxWxH): 59x19x0.5cm
Self Weight: 0.2kg
Packing: 40pcs/59x43x 27cm
G.W.: 7kg



SHE1303 B Cervical Collar

Unfolded Size(LxWxH): 54x13x0.5cm
Self Weight: 0.1kg
Packing: 40pcs /61x45x 39cm
G.W.: 6kg




SHE1302 L Head Immobilizer

Unfolded Size(LxWxH)
40x26x16cm
Self Weight: 1Kg
Packing: 8pcs/54x45x63cm
G.W.: 11Kg




SHE1302 C Head Immobilizer

Unfolded Size(LxWxH)
26x34x14cm
Self Weight: 0.5Kg
Packing: 10pcs/58x38x56cm
G.W.: 8Kg



SHE1101



SHE1102


SHE1101/02 Spine Board

Unfolded Size(LxWxH):
185x46x5cm / 183x45x6cm
Self Weight: 7kg
Load Bearing: 160kg
Packing: 1pc/carton,
carton size: 187x48x7cm
G.W.: 11kg / 10.0kg



SHE1103 Spine Board

Unfolded Size(LxWxH): 184x45x6cm
Self Weight: 8kg
Load Bearing: 160kg
Packing: 1pc/carton,
carton size: 187x48x7cm
G.W.: 10.5kg



SHE1105 Spine Board

Unfolded Size(LxWxH):138X35X6cm
Self Weight: 4Kg Load Bearing: 79Kg
Packing: 1pcs/ctn
G.W.:10Kg



SHE1001 Stretcher



SHE1003 Four-fold Stretcher

Unfolded Size(LxWxH):186X48X22cm
Floded Size(LxWxH):50X18X47 cm
Self Weight: 7.2Kg
Packing: 3pcs/carton



SHE1005 / SHE1006

SHE1005/SHE1006 Scoop Stretcher

Unfolded Size(LxWxH):214X42X70cm
Floded Size(LxWxH):167X42X70 cm
Self Weight: 8.5Kg
Load Bearing: 159Kg
Packing: 1pcs/170x43x90cm



SHE1007 Basket Stretcher

Unfolded Size(LxWxH): 218x64x18cm
Folded Size(LxWxH): 123x64x22cm
Self Weight: 18kg
Load Bearing: 270kg
Packing: 1pc/carton,
carton size: 130x68x31cm
G.W.: 25.0kg

SHE1008 Foldaway Stretcher

Unfolded Size(LxWxH):215X54X15cm
Folded Size(LxWxH):108X17X9cm
Self Weight: 5Kg Load Bearing: 159Kg
Packing: 2pcs/110x20x13cm
G.W.:10Kg

SHE1201 Stretcher for Ambulance Car (standard)

High position(LxWxH): 196x55x88cm
Low position(LxWxH): 196x55x26cm
Maximum Angle of the back: 53°
Self Weight: 33kg
Load bearing: 181kg
Packing: 1pc/ctn,
carton size: 202x62x27cm
G.W.: 48kg



SHE1011 Vacuum Mattress Stretcher

Unfolded Size(LxWxH):212X75X7cm
Folded Size(LxWxH):70X60X37cm
Self Weight: 5Kg Load Bearing: 159Kg
Packing: 1pcs/95x28x58cm



SHE1204 Stainless Steel Stretcher Trolley With Four Truckles

Unfolded Size(LxWxH):199X68X77cm
Folded Size(LxWxH):18X54X90cm
Self Weight: 11Kg Load Bearing: 79Kg
Packing: 1pcs/20x56x92cm
G.W.:10Kg



SHE1205 Emergency Bed

High Position(LxWxH):195x55x88cm
Range from Bed Surface to
Ground: 50cm
Size of the Castors: Φ 160mm
Self Weight: 33Kg
Load Bearing: 159Kg
Packing: 1pcs/198x58x31cm
G.W.:40Kg



SHE1209 Stretcher for Ambulance Car

High Position(LxWxH):195x55x90cm
Low Position(LxWxH):195x55x50cm
Max. Angle of the back: 65°
Max. Angle of the Knee Part: 15°
Size of the Castors: Φ 150mm
Self Weight: 42Kg
Load Bearing: 181Kg
Packing: 1pcs/200x63x41cm






SHE1009
Staircase Stretcher

Unfolded Size(LxWxH):70X52X91cm
Folded Size(LxWxH):90X54X17cm
Self Weight: 10Kg Load Bearing: 159Kg
Packing: 1pcs/94x58x18cm

Body Splint

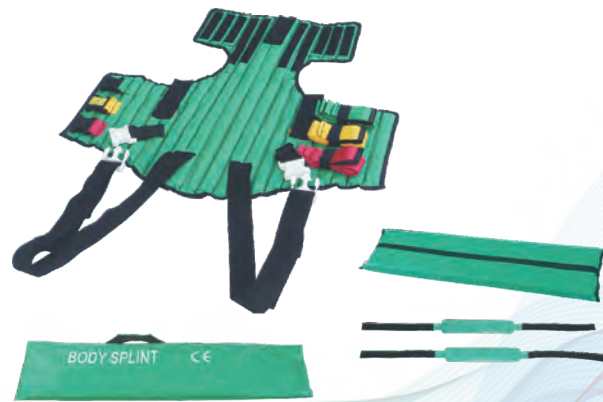

SHE1301 L
Body Splint

Unfolded Size(LxWxH):82x71cm
Self Weight: 3kg
Packing: 2pcs/ctn
carton size: 86x28x19cm
G.W.: 8kg



SHE1301 C
Body Splint

Unfolded Size(LxWxH):59x64cm
Self Weight: 2kg
Packing: 2pcs/ctn
carton size: 62x20x20cm
G.W.: 8kg




SHE1304
Fracture Fixation Splint

Self Weight: 3kg
Packing: 2pcs/ctn
carton size: 75x34x20cm
G.W.: 6kg

SHE1305
Fracture Fixation Splint

Self Weight: 1.5kg
Packing: 1pc/ctn
carton size: 92x36x16cm
G.W.: 2kg

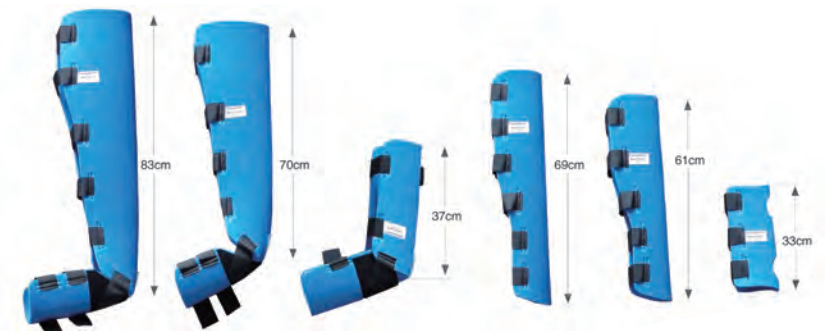

SHE1306
Air Splint

Self Weight: 1kg
Packing: 8pcs/ctn
carton size: 52x28x25cm
G.W.: 10kg



Hospital facility Series



always by your side



SHU11001 Stainless Steel Bed

Features:
Flat metal panel
Powder coating steel frame
Over All size 200x93cm



SHU11002 1 Function Manual Bed

Features:
Net Metal panel
Foldable aluminum guardrail
Powder coating steel frame
Detachable ABS head and foot board
Pedal locking castor
Packing Size: 209x102x28cm
Over all size: 212x96cm



SHU11201 2 Functions Manual Bed

Features:
Detachable guardrail
Stainless steel frame
Stainless steel head and foot board
Over all size 205x93cm



SHU13504
Electric Bed
(Seat Position Bed)



- Steel framework, top class ABS & pp Plastic
2. Detachable PP Head & foot board, Collapsible Aluminum protective railing power coated steel bed board, with ventilated holes
3. Overall Dimension: 2150mm(L)x980mm(W)x500mm
Bed board dimension: 1880mm(L)x740mm(W)
Fixed height (from bed board to ground): 500mm
4. Functions controlled by remote control:
Back-rest: 0-75°
Curved leg down: 0-75°
Sitting part sinking angle: 0-10°
1 button to seat position, 1 button to flat position
5. Net. Weight: 105kg
6. 4pcs universal castor, Φ125mm, individual brake
7. Standard accessory: I.V. Pole

SHU14001
Manual Transfer Stretcher




- Specification:
1. A type of manual transfer stretcher. Single crank for height adjustment, Turn by clockwise, stretcher will be up; Turn anti-clockwise, stretcher will be down.
2. Central-lock castors, diameter 150mm
3. Dimension: Overall diameter: 2020 x 740mm(L*W)
Height adjustment(bed board to ground): 880 - 580mm
Size of board: 1905 x 610mm (L*W)
Back-rest lifting angle: 0 - 60°±5°
4. Net. Weight: 82.00kg
5. Drop-down protective railing, PP bed board produced by blowing molding
6. Standard accessories: Mattress, I.V. Pole

Anti-Decubitus Mattress

SHU1501

- The bubble-type alternative mattress is made of non-toxic. PVC with nylon fabric.
- Characteristics of the alternative pump.
- Low-noise design. The operating noise does not exceed 45dB(A).
- Safe round edge design.
- Simple and lucid adjustment button.
- Air pump is provided with hanger at the backside, which may save space.
- Air charging pressure at the outlet of air pump is adjustable, maximum pressure $\geq 12\text{kPa}$.
- Under the maximum operating load, the maximum pressure of mattress $\geq 4\text{kPa}$.
- Maximum flow of air pump $\geq 4.5\text{L/min}$.

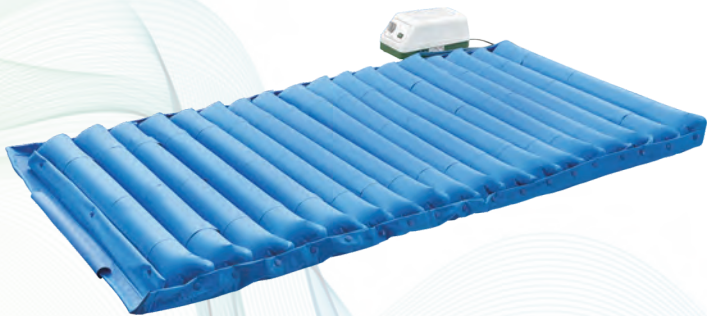


SHU1502

- The strip-type alternative mattress is made of non-toxic. PVC with nylon fabric.
- There are 18 interchangeable tubes.
- Characteristics of the alternative pump:
- Low-noise design. The operating noise does not exceed 45dB(A).
- Safe round edge design.
- Simple and lucid adjustment button.
- Air pump is provided with hanger at the backside, which may save space.
- Air charging pressure at the out let of air pump is adjustable, maximum pressure $\geq 12\text{kPa}$.
- Under the maximum operating load, the maximum pressure of mattress $\geq 4\text{kPa}$.
- Maximum flow of air pump $\geq 4.5\text{L/min}$.

SHU1503

- The strip-type alternative mattress is made of non-toxic PVC with nylon fabric.
- There are 22 interchangeable tubes.
- Characteristics of the alternative pump:
- Low-noise design. The operating noise does not exceed 45dB(A).
- Safe round edge design.
- Simple and lucid adjustment button
- Air pump is provided with hanger at the backside, which may save space.
- Air charging pressure at the outlet of air pump is adjustable, maximum pressure $\geq 12\text{kPa}$.
- Under the maximum operating load, the maximum pressure of mattress $\geq 4\text{kPa}$;
- Maximum flow of air pump $\geq 4.5\text{L/min}$.

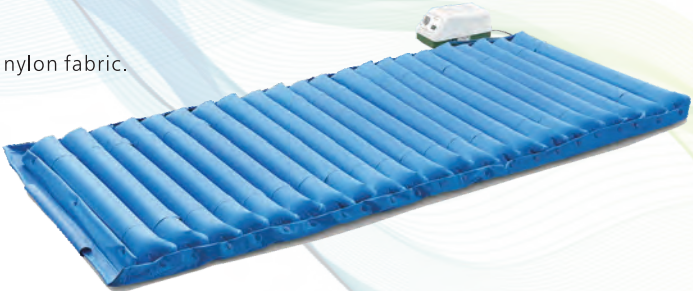

Specification	Appearance	Gas Circuits Numbers	Color of air pump back shell	L*W*H (cm)	Operating Mode Of Air Pump	Rotary valve motor R.P.M	Inflatina time (min)	Deflating Time(min)	Exchanging Time(min)
SHU1501	Bubble type	2	Dark grey	187±8*90±5*7±1	Alternative	1/5.1/6	3	3	6
SHU1502	Strip type	2	Dark green	198±8*90±5*11±1	Alternative	1/10.1/12	6	6	12
SHU1503	Strip type	2	Dark grey	188±8*83±5*8±1	Alternative	1/5.1/6	3	3	6



SHU1805
Baby Bed

Specification:82x46x65/90cm



SHU1803
Baby Bed

Specification:80x41x92cm



SHU1801
Stainless Steel Baby Bed

Specification:160x80x70cm



SHU1804
Stainless Steel Double-rocker Baby Bed

Specification:73x45x61/96cm



SHN1207

Moveable I.V. Stand



SHN1201

Infusion Stand



SHN1205

Base with ABS plastic, stainless pole



SHN1202

Base with painting steel, stainless pole



SHN1203



SHN1204



SHN1206

Aluminum alloy transfusion supporter with elliptical orbit



SHN1208
Ward Screen
Size: 1500*1800mm



SHN1209
Case-history Folder
ABS, Size: 325x230mm



SHN1301
Emergency Trolley

1. Two castors with locking brake, two without
 2. Two smaller drawers, two medium size drawers, and a big drawer
 3. Buckets and I.V Pole are adjustable
- Specification: 850x520x1010mm
0.66CBM



SHN1302
Multi-function Medical Trolley

Specification(mm): 820X510X950

BEDSIDE CABINET



Color

A	B	C	D
---	---	---	---



SHR1601

1. specification: 49cmx49cmx77cm
2. Packaging: 1PC Protective railing 0.19 CBM
3. Component: two towel hangers, a slide board, a drawer, partition board inside, 2pcs oddement hooks.

SHR1602

1. specification: 49cmx49cmx77cm
2. Packaging: 1PCS Protective railing 0.19 CBM
3. Component: two towel hangers, 2pcs oddement hooks, a slide board, a drawer, partition board inside, castors (PVC plastic)



SHR1606
Bedstand

1. specification: 53cmx52cmx72cm
2. Packaging: 1PCS Protective railing 0.20 CBM
3. Component: two towel hangers at both side, 2pcs oddement hooks, a slide board, a drawer, the body material is Iron, castors (PVC).



SHN1303
Anesthesia Trolley

Material: Aluminum-Alloy, ABS Plastic and Stainless steel
4pcs universal castors, Φ100mm, 2 with brake, 2 without
Size: 673x480x920mm



SHN1304
Medicine Trolley

Overall Dimension: 740x600x1080mm
6 layers, existing 5 cases of the medicine boxes.
A big waster-storage bin at the bottom
Top working surface size: 600x450mm
4pcs universal castors, Φ125mm, Individual brake
Net Weight: 68kg



SHN1305
IV Treatment Trolley
Material: Aluminum-Alloy,
ABS Plastic and Stainless steel
Size: 720x475x920mm



SHN1306
IV Treatment Trolley
Size: 673x480x920mm



SHN1401
Size: 55X39.5X88cm



SHN1402
Size: 55X39.5X95.5cm



SHN1403
Size: 64x45x77cm



SHN1307
Case History Trolley
25-Shelf Case History Trolley



SHN1308
Case History Trolley
50-Shelf Case History Trolley



SHN1404
Size: 58.8x42.8x89cm



SHN1406
Size: 80x59x89cm



SHN1405
Size: 10.05x54x93.6cm

HOSPITAL TROLLEY

Stainless steel instrument trolley (2 / 3 / 4 ply)



SHN1501

Specification(mm):650x450x900



SHN1502

Specification(mm):900x440x1140



SHN1503

stainless steel
laundry bag trolley-I type
specifications: 800x600x920mm



SHN1504

stainless steel
hot water trolley
specifications: 630x490x980mm



SHN1505

stainless steel
medicine trolley(2-ply drawer)
specifications: 655x400x830mm



SHN1506

infusion trolley-IItype
specifications: 700x450x1500mm



SHN1507

stainless steel
operation room dressing trolley
specifications: 1200x600x1100mm



SHN1508

3-ply stainless steel
instrument trolley (with drawer)
specifications: 770x470x900mm



SHN1509

stainless steel dirt trolley
specifications: 960x550x800mm

HOSPITAL CHAIR



SHN1101

Stainless Steel Transfusion-chair

Specification(mm) 60X77X108
Packing Size (mm) 90x63x35
Description: 3 angles adjustable
Net Weight 19KG



SHN1102

Transfusion-chair

Specification(mm) 70X77X108
Packing Size (mm) 90x63x35
Description: 3 Angles adjustable
Net Weight 21.5 KG



SHN1103

Stainless Steel Accompanier's Chair

Specification(mm) 62X61X42
Stretch Size 62x188x58
Packing Size (mm) 120x66x21
Description The fabric is pressed PVC artificial leather
Net Weight 17KG



SHN1104

Waiting Chair

Specification(mm) 540MM for Single
Description: Galvanized surface
Net Weight 40 KG(3 PCS)

HOSPITAL TROLLEY



SHN1105

Stainless steel two arm lifting tray rack
specifications:650x430x940/1400mm



SHN1106

stainless steel operation bench-I Btype
specifications:Φ300x500-660mm



*Hospital e Equipment
Series*

always by your side

Chair-Mounted Dental Unit

SHS1102

Standard Accessories:

Cold shadowless operating lamp	1pc
Imported air turbine high speed handpiece	2pcs
Imported low speed air motor handpiece	1pc
3-way syringe	1pc
Adjustable constant temperature cupfilling system	1pc
Water suction	1pc
Air suction	1pc
X-Ray film viewer	1pc
Dental stool	1pc

Features:

- 1、 Comfortable dental patient chair with somatological design
- 2、 Top mounted instument tray with more convenience to dentist's treatment
- 3、 Easily move the whole cuspidor which make sterilization and cleanness more convenient
- 4、 Rotatable cuspidor unit and assistant bar make assistant closer with patient fully
- 5、 Driving and controlling power all are low voltage which make operation more safe and reliable



SHS1109

Standard Accessories:

24V DC motor for chair(double armrest)	1set
Auto spittoon flusing and filler control system	1set
Control system(without memory)	1set
Instrument tray with air break(down-mounted)	1set
Build-in florr box with main switch(Moisture electric)	1set
Rotatable handpiece holder	1set
Glass spittoon	1set
Foldable headrest	1set
Seamless cushion(PU)	1set
Muti-function foot controller	1set
High suction and saliiver ejector system	1set
Outer water tank	2sets
Imported medical water/gas pipe	1set
LED-1 operation light	1set
LED film viewer	1set
3-way syringe(hot/cold)	2sets

Optional Accessories:

Ceramic spittoon,Endoscope system,outer floor box, imported electro-motor, Impored/Domestic 4 holes high speed handpiece,imported/domestic curing light,import/domestic scaler, Central suction system,Oiless compressor.



ELECTRICAL OPERATING TABLE

SHS1201 Gynecological Table

This type gynecological table is suitable for conducting gynecological surgery, operative abortion and gynecological examination, etc by medical unit.

Features:

Unique profile design which is beautiful and elegant.
Foot step hydraulic elevating and various actions are controlled by pneumatic.
Imported Y type sealing ring with good sealing performance and is durable.
Whole sainless steel hidden auxiliary table with flexible extension and retraction
Foot treadle brake device which is easy for moving operating table.

Technical specification:

Table length:1330±50mm
Table width:550±30mm
Auxiliary table:340mmx460m(±20mm)
Back board fold upward:75°
Forward inclining of the platorm:≥17°
Backward inclining of the platorm:≥17°
Back board fold upward:≥70°
Table at the lowest level:≤650mm
Table elevating stroke:≥250mm
Auxiliary table stroke:≥500mm

Accessories:

A pair of leg support frame
A stainless steel sewage basin
A pair of armrest

SHS1202 Colligated Delivery Bed

Technical Specification:
Lengh:1900±50mm
Width:600±10mm
Maximum and minimum height of the platform : 650±100mm
Length and width of auxiliary table:
Length:520mm
Width:500mm
up and down:≥300mm
Forward:≥10°
Backward:≥15°
Back board fold upward:≥60°
Main Voltage:AC 220V 50Hz
Power:150VA



SHS1204 Ordinary Obstetric Bed

Used for obstetrics gynecology examination. The bed top and main structure are all made of stainless steel 304#.

Length/Width/Height
Back Section Up/Down
Seat Section Up/Down
Leg Section Up/Down
1900mm/600mm/750mm
≥45°/≥10°
≥25°/≥8°
≥25°/≥25°

SHS1203 Electrical Operating Table

Specification:


Table Length mm	2000±100
Table Width mm	520±20
Height Adjustment mm	(750 ~ 1000)±50
Horizontal and longitudinal movement mm	350±30
Backboard Upwards	≥70°
Backboard Downwards	≥15°
Trendelenburg/Rev - Trend	≥18°
Tilt(Left)/ Tilt(Right)	≥15°
Head board Upwards	≥40°
Head board Downwards	≥90°
Leg board Upwards/Leg board Downwards	≥15°/≥90°
Leg board Outwards	≥180°
Waist board lifting mm	100±20
Lumbar upper corner “^”	≤150°
Lumbar lower corner “V”	≤120°
Main Voltage AC	220V±22V, 50Hz±1Hz
Input Power VA	300±10%



SHS1206

Electrical Operating Table

Technical Specification:
 Table length:2000mm±50mm
 Table width:500mm±20mm
 Maximum and minimum height of the platform:(750~1000)±50mm
 Forward:≥25°
 Backward:≥35°
 Leftward:≥15°
 Head board fold upward:≥40°
 Head board fold downward:≥90°
 Waist board lifting:≥100mm
 Leg board fold downward:≥90°
 Leg board fold outward:≥90°
 Back board fold upward:≥50°
 Back board fold downward:≥20°
 Main Voltage:AC 220V 50Hz
 Input power:300VA

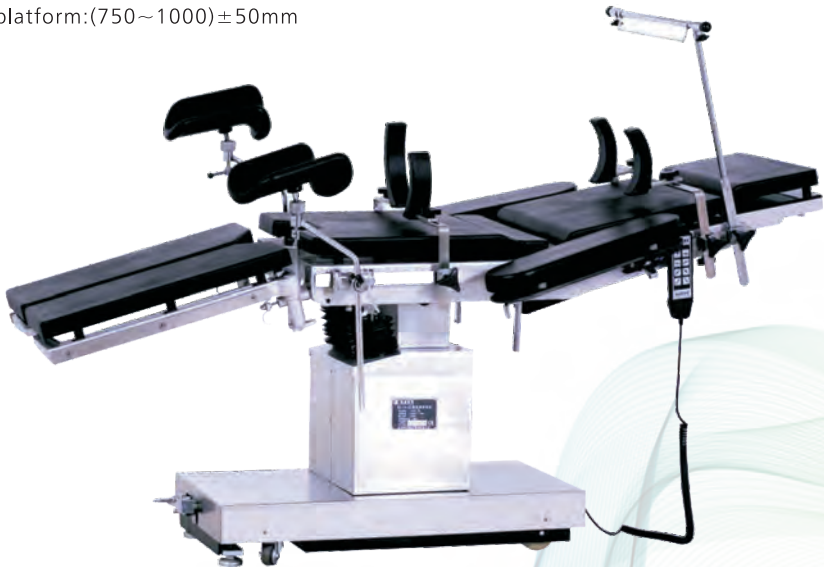

X-Ray Machine



SHS1501

X-Ray Machine

Main Purpose and Features:
 This x-ray apparatus features full-wave rectification and modular x-ray tube head
 The frame of the unit,of canilever construction.
 The machine can be used for radiography in hospital wards or operating rooms.

Main Technical Data:
 1.Power requirements voltage:180-240V Frequency:50HZ
 Internal resitivity<1.0Ω Rating:5k VA
 Current:Maimun 15A for radiography
 2.Time:0.08s-6.
 3s steps electronic
 4.Max.height from x-ray tube focs to floor > 1820mm
 Min. height from x-ray tube focs to floor< 550mm
 5.Colimator:Max.film size at 10000mm
 Focal Distance:430mmx430mm
 6.Max.control distance:6m
 7.X-ray tube focs:2.3x2.3 Unit moving force:< 5kg
 8.N.W.:90kg

Maximum ratings

Kv mA	S	0.08-1.0	2.0-2.5	3.2-4.0	5.0-6.3
30		90	90	90	90
40		90	90	90	/
50		90	90	/	/

SHS1502

X-Ray Machine

Main Usage and Features:
 This x-ray appartus features fullwave rectification and modular x-ray tube head.The frame of the unit is of cantilever construction,and is compact in design and easy in movement.The machine can be used for Radiography in hospital wards or operating rooms.
 Max.Ratings

Main Technical Data:
 1.Power requirements :
 Voltage:180-240V Frequency:50HZ
 Internal resistance:≤1Ω rating:5k VA
 Current:Max. 15A for radiography
 2.Time:0.08to 6.32 steps electronic
 Max. height from x-ray tube focs to floor > 1820mm
 Min.height from x-ray tube focs to floor< 550mm
 3.Collimator:Max. film size at 1000mm
 Focal distance:430x430mm
 4.Max.control distance:6m
 Unit moving force:< 5kg
 5.N.W.:90kg



Maximum ratings

Current(ma)	Voltagec (kVp)	Exposure time(second)
30	90	0.063-5.0
50	90	0.063-1.0
50	80	0.063-2.5
70	70	0.063-1.0

SHS1208

Electric Table for Gynaecology and Obstetrics

SHS1208 is the most latest electric table that can be used for Obstetrics birthing, Gynecological operation and examination.The tabletop elevation,trendelenburg/reverse trendelenburg, back plate all controlled by both micro touch hand remote control and foot switch.
 Imported electric motors enable flexible,smooth movements,low noise,high reliability.
 All base and column cover is made of 304 medical grade stainless steel.
 Seamless mattress can be colorfully customized,easy to clean and sterilize."





SHS1309 Diaphragm Type Electrical Suction Unit For Inducedabortion

Mains:AC 220V±10% 50Hz
Pump structure: imported film type pump
Air pumping efficiency:≥35L/min for stage 1 ≥15L/min for stage 2
Negative pressure:≥0.09Mpa
Adjustment rage of negative pressure:0.01 ~ 0.09MPa
Input power:400VA
Liquid vessel:500ml×2
Air storage vessel:2500ml×2
Noise level:≤45dB
Work mode: intermittent loading, continuous operation



SHS1306 Electric Suction Apparatus

Mains:AC 220V ±10% 50Hz
Pump Structure:Diaphragm Type
Air pumping efficiency: ≥20L/min
Negative pressure: ≥0.090Mpa
Adjustment Range of Negative Pressure: 0.013MPa~0.090Mpa
Input Power:600VA
Liquid Vessel:2500ml x2
Noise level: ≤50dB
Work mode:Intermittent loading,Continuous operation



SHS1317 Electrical Suction Device

Mains: AC 220V±10% 50Hz
Pump structure: imported film type pump
Air pumping efficiency:≥25L/min (35L pump suitable)
Negative pressure:≥0.09MPa
Adjustment range of negative pressure:0.013 ~ 0.09MPa
Input power:400VA
Liquid vessel:2500ml×2
Noise level:≤55dB
Work mode:intermittent loading, continuous operation



SHS1315 Electrical Suction Device (Mobile Setup)

Mains:AC 220V±10% 50Hz
Negative pressure value:≥0.09Mpa
Air pumping efficiency:≥25L/min
Pump structure: imported film type pump
Liquid vessel:2500ml×2
Adjustment range of negative pressure:0.013 ~ 0.09Mpa
Noise level:≤55dB
Input power:150VA
Working mode: Intermittent loading, continuous operation



SHU2001 Transport Incubator

Temperature controller, Storage battery, oxygen cylinders(2pcs), Infant bed, Skin temperature sensor, I.V. Pole, air filter, observation lamp, air cushion lamp, air cushion stand, power cord(AC or DC)

Technical Specification:
Power supply: AC220V-230V/50Hz or AC110-120V/50-60Hz, 1300VA
DC Power requirement: DC12V/10A or DC24V/6A
Air temperature control range: 25℃-37℃(override mode 37℃-39℃)
Baby temperature control range: 34℃-37℃(override mode 37℃-38℃)
Accuracy of skin temperature sensor: ±0.2℃
The temperature fluctuation range between incubator temperature and average incubator temperature (under stable temperature condition): ≤1.0℃
Temperature uniformity: ≤1.5℃(mattress is on the horizontal position)
Noise inside hood: ≤52 dB(A)
Package:
Gross weight: main body 80kg/Cabinet 35kg
Measurement(mm): Main body: 1090x655x760mm,
Cabinet: 1380x610x400mm



SHU2002 Transport Incubator

Standard Configure:
Temperature controller, Humidity system(optional), oxygen infusion(optional), Infant bed, integrated sensor box, X-ray cassette frame, humidity water tank, I.V. Pole, tray, air filter, lift stand.

Technical Specification:
Power Supply: AC220V-230V/50Hz or AC110-120V/50-60Hz, 1300VA
Air temperature control range: 25℃-37℃(override mode 37℃-39℃)
Baby temperature control range: 34℃-37℃(override mode 37℃-38℃)
Accuracy of skin temperature sensor: ±0.2℃
The temperature fluctuation range between incubator temperature and average incubator temperature(under stable temperature condition): ≤0.5℃
Temperature uniformity: ≤0.8℃(mattress is on the horizontal position)
Inclination of the bassinet: ±8°
Noise inside hood:≤45dB(A)
Humidity display range: 0%RH~99%RH
Indication range of oxygen concentration: 0%~99%
Weighing Range: 100-8000g(weighing system is optional)
Package:
Gross weight: main body 70kg/Cabinet 60kg
Net Weight: Main body 59kg/Cabinet 50 kg
Measurement(mm): Main body: 1100x707x888mm
Cabinet: 1029x697x831mm



SHU2009 Infant Incubator

Technical Specification:
Power supply: AC220V-230V/50Hz or AC110-120V/50-60Hz, 1300VA
Air temperature control range: 25℃-37℃(override mode 37℃-39℃)
Baby temperature control range: 34℃-37℃(override mode 37℃-38℃)
Accuracy of skin temperature sensor: ±0.2℃
The temperature fluctuation range between incubator temperature and average incubator temperature (under stable temperature condition): ≤0.5℃
Temperature uniformity: ≤0.8℃(mattress is on the horizontal position)
≤1.0℃(mattress is on the maximum tilt position)
Noise inside hood: ≤45dB(A)
Humidity display range: 0%RH~99%RH
Indication range of oxygen concentration: 0%~99%
Weighing Range: 0-8000g



SHU2101 Infant Radiant Warmer

Standard Configure:
Radiant box (2pcs of heating lamps, 2pcs of observation lamps, 2pcs of phototherapy lamps), temperature controller, skin temperature sensor(1,2), infant bed (with organic glass plates), colloid heating mattress, I.V. Pole, shelf, tray, drawer and lift stand.
Technical Specification:
Power Supply: AC220V-230V/50Hz or AC110-120V/50-60Hz, 900VA
Blue LED bilirubin phototherapy unit
Baby Mode temperature control range: 34.5℃-37.5℃
Control accuracy: ≤0.5℃
Accuracy of skin temperature sensor: ±0.2℃
Temperature uniformity of mattress: ≤2℃
Mattress heating control range: 25℃-38℃
Accuracy of mattress temperature display: ±0.7℃
Angle of warmer module: ±60° , radiant heating focus on the mattress
APGAR timer: audible and visible alarm when the device runs to 50'' ~1' , 4' 50'' ~5' , 9' 50'' ~10'



SHU2103 Infant Radiant Warmer

Standard Configure:
Radiation head, temperature controller, skin temperature sensor, bed temperature sensor, I.V. Pole, bed body, mattress, Sand
Technical Specification:
Power Supply: AC220V-230V/50Hz or AC110-120V/50-60Hz, 600VA
Baby Mode temperature control range: 34.5-37.5℃
Skin temperature display range: 5℃-65℃
Accuracy of skin temperature sensor: ±0.2℃
Temperature uniformity of mattress: ≤2℃
Angle of heater head: 0°, 30°, 60°for two ways
Inclination of the bassinet: five tilt position
APGAR timer: Audible and visible alarm when the device runs to 50'' ~1' 、 4' 50'' ~5' 、 9' 50'' ~10'



SHU2104 Infant Radiant Warmer

Standard Configure:
Radiation box, upper box, lower box, temperature controller, skin temperature sensor, Bed temperature sensor, Infant bed, bed deck, I.V. Pole, Stand.
Technical Specification:
Power Supply: AC220V-230V/50Hz or AC110-120V/50-60Hz, 850VA
Double sides phototherapy radiant box
Baby Mode temperature control range: 34.5-37.5℃
Skin temperature display range: 5℃-65℃
Accuracy of skin temperature sensor: ±0.2℃
Temperature uniformity of mattress: ≤2℃
Dominant wavelength of blue light: 400-550nm
Timing range of blue light: 0~9999hrs 59min
APGAR timer: audible and visible alarm when the device runs to 50'' ~1' 、 4' 50'' ~5' 、 9' 50'' ~10'

INFANT INCUBATOR / INFAC T RADIANT WARMER



SHU2201 Neonate Bilirubin Phototherapy Equipment

Light switch in draw out type
Two kinds of timer mode: Count up and Count down
LCD display indicates the accumulative running time and the current working time

Technical Specification:

Model	SHR2201A	SHR2201B
Power Supply	AC220V-230V/50Hz, 75VA	AC220V-230V/50Hz, 40VA
Light resource	Blue LED	Blue fluorescent lamp
Lifetime of LED	20000 hours	20000 hours
Lifetime of the Fluorescent lamp	2000 hours	2000 hours
The total irradiance for bilirubin on the effective surface area	≥3.0mW/cm2	≥2.8mW/cm2
Average value general bilirubin radiation of on the effective surface area	≥2.6mW/cm2	≥2.0mW/cm2
Uniformity of the total irradiance for bilirubin	>0.4	>0.4
Dominant wavelength of blue light	400-550nm	400-550nm
Max. load of mattress	10kg	10kg
Indication range of accumulative running time for lamp	0~99999.9 hours	0~99999.9 hours
Indication range of current running time for lamp	0~999.9 hours	0~999.9 hours
Working noise	≤50dB(A)	≤50dB(A)

SHU2202 Neonate Bilirubin Phototherapy Equipment

Standard Configure:
Temperature Controller, Up Cabinet, Cabinet, Infant Bed, I.V. Pole
Technical Specification:
Power requirement: AC220V-230V/50Hz or AC110-120V/50-60Hz, 600VA
Low noise DC motor
Temperature control range: 25℃-34℃
Skin temperature sensor display range: 5℃-65℃
Correlation of displayed average value and actual average value (stable temperature condition) : ≤0.8℃
Accuracy of skin temperature sensor: ±0.3℃
Noise level above the bed: ≤55dB(A)
Uniformity of the total irradiance for bilirubin: >0.4
Dominant wavelength of blue light: 400nm-550nm



SHU2203 Neonate Bilirubin Phototherapy Equipment

Standard Configure:
Radiant box, Pillar, Lift pole, Stand
Technical Specification:
Power requirement: AC220V-230V/50Hz or AC110-120V/50-60Hz, 150VA
Light source:Blue fluorescent lamp
Peak spectrum of radiant light resource: 436nm
The total spectral irradiance on the effective surface area: ≥1mW/cm2
Average value general bilirubin radiation on the effective surface area: ≥0.9mW/cm2
Uniformity of the total irradiance for bilirubin: >0.4
Dominant wavelength of blue light: 420-470nm
Lifetime of blue fluorescent lamps: 2000hrs
Adjustable range for the height of lamp module: 1350mm~1650mm
Built-in timer range: 0~9999 hrs 59min



SHU2204 Neonate Bilirubin Phototherapy Equipment

Technical Specification:
Power Supply: AC220V-230V/50Hz or AC110-120V/50-60Hz, 50VA
With blue LED
The total irradiance for bilirubin on the effective surface area: ≥1.0mW/cm2
Average value general bilirubin radiation of on the effective surface area: ≥0.8mW/cm2
Uniformity of the total irradiance for bilirubin: >0.4
Dominant wavelength of blue light: 420-470nm



SHU3301 Fetal Doppler

Feature:
1. High sensitive ultrasound & Interchangeable waterproof probe.
2. Detect the heart rates of 9th week fetus.
3. Work more than 12 hours after full charge.
4. Support single & twin probe.

Display	LED Screen
Ultrasound Frequency	2.2MHz or 3.3MHz
FHR Range	50 - 210BPM
Dimension	24x16x11.5cm
Battery	14.4 V Nickel hydrogen battery
Accessories	User manual, Adapter, Battery



SHU3302 Fetal Doppler

Features:
1. High sensitive ultrasound.
2. Detect hear rates of 12h week fetus.
3. Automatic SHRtdown after 1 minute without operation.
4. Built-in loudspeaker.

Display	Backlight LCD Display
Ultrasound Frequency	3.0MHz
FHR Modes	Real-time, Average and Manual
Dimension	133x85x31 mm
Battery	Rechargeable batter(optional: AA Battery x 3)
Accessories	User manual, Battery





SHU3303 Fetal Doppler

Features:

1. High sensitive ultrasound & Interchangeable waterproof probe.
2. Detect the heart rates of 12th week fetus.
3. Built-in Loudspeaker.

Display	Backing LCD Display
Ultrasound Frequency	2.5MHz
Dimension	215x200x68mm
Battery	Rechargeable battery(Optional: AA Battery x 2)
Accessories	User Manual, Adapter, Battery



Baby
monitor



Clinically
tested



From
12th week



Battery
included



LED screen
display

SHU3304 Fetal Doppler

Features:

1. High sensitive ultrasound & Interchangeable waterproof probe.
2. Detect the heart rates of 12th week fetus.
3. Automatic SHRTdown after 1 minute without operation.
4. Built-in loudspeaker.

Display	Colorful Display
Ultrasound Frequency	2.5MHz
FHR Modes	FHR value, FHR waveform volume
Dimension	215x200x68mm
Battery	118mah lithium battery
Accessories	User Manual, Adapter, Battery



Baby
monitor



Clinically
tested



From
12th week



Battery
included



Colorful
display

The pulse oxygen saturation is the percentage of HbO₂ in the total Hb in the Blood, So-called O₂ concentration in the blood, which is an important physiological parameter for the respiration system. Pulse Oximeter can check SPO₂ through the finger, so they are applicable for use in clinic, hospital, first aid, oxygen bar, community healthcare, sports, aviation and homecare, etc. And especially for the people with unstable hemoglobin such as:

1. People with blood vessel diseases (Congestive heart failure, high pressure, hyperlipidemia, etc) and respiratory system disease (Asthma, trachitis, chronic obstructive pulmonary disease, etc).
2. Aged people
3. People addicted to alcohol
4. People working in high elevation area
5. People in sub-healthy condition or who concern their health

SHU3401 Oximeter

Function

Main Features

SpO₂ value display

Pulse rate value display, bar graph display

Pulse waveform display

The display mode can be changed

Screen brightness can be changed

Low-voltage indication: low-voltage indicator appears before working abnormally which is due to low-voltage.



SHU3402 Oximeter

Main Features

Small in volume, light in weight, easy for carrying

Integrated SpO₂ sensor, processing and displaying module in one device

Easy and convenient to operate

Smart voice prompt of SpO₂ value and PR value

Display of SpO₂ value and PR value

Bar graph display

Low battery indication: Battery icon flickers with voice prompt before battery runs out.

SHU3403 Pulse Oximeter



Function
Small in volume, light in weight and convenient in carrying
Easy to operate, low power consumption
SpO2 value display
Pulse rate value display, bar graph display
Pulse waveform display
Screen brightness can be changed
Pulse rate sound indication
With measured data overruns limits and low-voltage alarm function, the upper/lower alarm limit can be adjusted
Clock function
Battery capacity indication
Low-voltage indication: Low-voltage indication appears before working abnormal caused by low voltage.
Data storage function, stored data can be uploaded to computer
External SpO2 probe

SHU3404 Oximeter



Function:
Small in volume, light in weight and convenient to carry.
Easy and simple to operate, low in power consumption.
With function menu.
Display of SpO2 value.
Display of PR value and bar graph.
Display of pulse waveform.
Adjustable screen brightness, PR sound indication.
Review function.
Clock function.
Audible prompt for over-limit and low battery.
Battery status indication.
Low battery indication.
Storage function for SpO2 and PR values, and data stored can be uploaded to PC.
Real-time data can be uploaded to PC.
External SpO2 probe can be connected.



SHU1701 Professional Dental Oral Irrigator

Specification:
Rated Voltage: 230V AC~50Hz
Power consumption: 40W
Water Pressure: 90~200Psi
Pump frequency: 1200imp/min
Max operating time: 10 minutes
Water tank: 500ml
Dimension: 180mmx165mmx140mm
Recommended by dental professional for adults and children
For prevention of plaque gingivitis and many dental diseases.
Package content: 1pc/box, 8pcs/carton, 65x39x23.5cm.
G.W./N.W.: 9.1/8.3kgs.

SHU1702 Professional Dental Oral Irrigator

Specification:
Rated Voltage: 230V AC~50Hz
Power consumption: 40W
Water Pressure: 90~200Psi
Pump frequency: 1200imp/min
Max operating time: 10 minutes
Water tank: 500ml
Dimension: 180mmx165mmx140mm
Recommended by dental professional for adults and children
For prevention of plaque gingivitis and many dental diseases.
Package content: 1pc/box, 8pcs/carton, 65x39x23.5cm.
G.W./N.W.: 9.1/8.3kgs.



SHU1801 Oxygen Absorber

Service Medium: O₂
Metering Range(L/min): 1-10
Accuracy: grade 4
Entrance Pressure(MPa): 12Mpa
Exit Pressure(MPa): 0.2-0.3MPa
Entrance Connection Screw thread: G5/8-14-RH
Output Connection Screw thread: 8mm



SHR1901

Compressor Nebulizer

Specification:
Rated Voltage: AC 230V, 50Hz
Voltage Adjustable: 230V/120V(Optional)
Extreme Pressure: >250Kpa
Nebulizing Pressure: 100 - 190Kpa
Noise Level: ≤60dB
Max Capacity of nebulizer kit: 10ml
Nebulizing Rate: ≥0.2ml/min
MMAD: 4.3um
FPD: ≥70%
Continuous working time: ≥4 hours
Carton size: 390x320x440mm
N.W.: 9.8kg G.W.: 10.5kg



SHR1903

Compressor Nebulizer

Specification:
Rated Voltage: AC 230V, 50Hz
Voltage Adjustable: 230V/120V(Optional)
Extreme Pressure: >205Kpa
Nebulizer Pressure: 100 - 190Kpa
Noise Level: ≤60dB
Max Capacity of nebulizer kit: 10ml
Nebulizing Rate: ≥0.2ml/min
MMAD: 4.5um
FPD: ≥70%
Continuous working time: ≥4 hours
Carton size: 550x410x245mm
N.W.: 8.3kg G.W.: 9.1kg

SHR1902

Ultrasonic Nebulizer

Specification:
Power: 220 - 240VAC 50/60Hz
Power consumption: Approx. 40VA
Max. Nebulizing rate: ≥2.0ml/min
Particle size: ≈5um
Medication cup capacity: 12ml
Noise Level: ≤55dB
Carton Size: 520x500x225mm
N.W.: 10.6kg G.W.: 11.6kg



SHR1904

Compressor Nebulizer

Specification:
Rated Voltage: AC 230V, 50Hz
Voltage Adjustable: 230V/120V(Optional)
Extreme Pressure: >205Kpa
Nebulizer Pressure: 100 - 190Kpa
Noise Level: ≤55dB
Max Capacity of nebulizer kit: 10ml
Nebulizing Rate: ≥0.2ml/min
MMAD: 4.2um
FPD: ≥75%
Continuous working time: ≥4 hours
Carton size: 305x230x275mm
N.W.: 6.0kg G.W.: 7.0kg



SHR1905

Compressor Nebulizer

Specification:
INPUT: 100 - 240V, 50 - 60Hz
Rated Voltage: DC 12V 1A
Extreme Pressure: >125Kpa
Noise Level: ≤55dB
Max Capacity of nebulizer kit: 10ml
Nebulizing Rate: ≥0.2ml/min
MMAD: 3.5um
FPD: ≥85%
Continuous working time: 20 minutes on, 40 minutes off
Carton size: 470x390x270mm
N.G.: 9.5kg G.W.: 10.2kg

SHR1906

Compressor Nebulizer

Specification:
Rated Voltage: AC 230V, 50Hz
Voltage Adjustable: 230V/120V(Optional)
Extreme Pressure: >205Kpa
Nebulizer Pressure: 100 - 190Kpa
Noise Level: ≤60dB
Max Capacity of nebulizer kit: 10ml
Nebulizing Rate: ≥0.2ml/min
MMAD: 4.2um
FPD: ≥75%
Continuous working time: 20 minutes on, 40 minutes off
Carton size: 400x290x290mm
N.W.: 7.0kg G.W.: 7.9kg



Model Series

always by your side

Adult Heart Model Human Skeleton Model



SHM1101
Adult Heart Model

Size: life size, 2 parts
Material: PVC



SHM1102
Human Skeleton Model

Features:
The model shows all the anatomic details of skeleton structure.
Joint and upper, lower extremities are removable.

Size: 180cm
Material: advanced PVC
Package size: 97x45.5x28cm
G.W.: 14kgs



SHM1103
Human Skeleton Model

Features:
Metal hanger, normal erect posture, limbs can be removable., display bony framework and physical relations.

Size: 85cm
Material: imported PVC
Package size: 19x19x26cm
G.W.: 1.3kgs

CPR Training Manikin

SHM1104 CPR Training Manikin

- 1.Simulate standard open airway and sound prompting
- 2.External breast compression:indicator light display,digital counter display and sound pompting
 - a.Indicator light display of correct and wrong compression position;digital counter display;sound prompting of wrong compession.
 - b.Display of corect(at least cm) and wrong (less than 5cm) compression depth;counter display;sound prompting of wrong operation.
- 3.Artificial respiration(Inhalation)indicator light display,digical counter display and sound prompting;
 - a.Inhalation is $\leq 500\text{ml}/600\text{ml}-1000\text{ml}\leq$; strip indicator light shows inhalation volume;counter display of correct and wrong operation.
 - b.Inalation too quickly or too much result in air entering into stomach,counter display of sound prompting of wrong operation.
- 4.Ratio of compression and artificial respiration:30:2(one or two person)
- 5.Operating cycle:one cycle includes five times of 30:2 ratio of compression and artificial respiration
- 6.Operating frequency:at least 100times per minute
- 7.Operation methods:exercise operation;examine operation
- 8.Operation time:counting down device
- 9.Print:print operation result
- 10.Examination of pupil response:mydriasis and myosis
- 11.Examination of carotid response:simulate spontaneous carotid pulse in compression process
- 12.Working conditions:input power is 110-240V

- Main components:
- | | |
|------------------------------------|--------------------------------------|
| 1.Full body manikin (1) | 2.Monitor(1) |
| 3.Portable plastic box(1) | 4.CPR operation pad(1) |
| 5.CPR face shield sheet(50pcs/box) | 6.Exchangeable lung bag(5) |
| 7.Exchangeable face skin(1) | 8.Temperature sensing print paper91) |
| 9.Guide manual(1) | |

- Package:
- Size:97x33x58cm
- G.W.:22KGS
- Optional function:
- 1.Endotracheal intubation
 - 2.Gastrolavage
 - 3.Trauma limbs




Brain With Arteries Model Basic Nursing Manikin / Skull Model



SHM1105 Brain With Arteries Model

Size:life size,
9 parts
Material:PVC

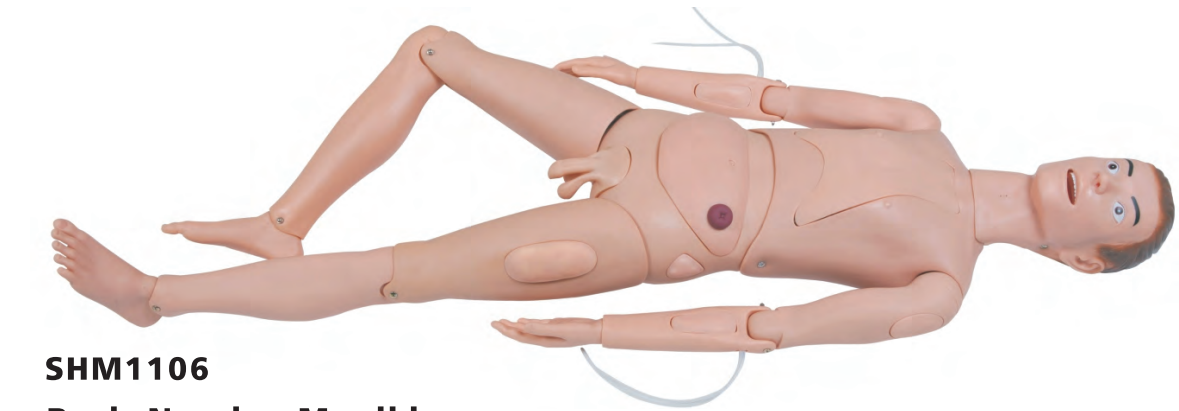

SHM1106 Basic Nursing Manikin


- Features:
- 1,Hair and face washing
 - 2,Eye and ear washing and administering
 - 3,Mouth cavity and artificial teeth care
 - 4,Endotracheal intubation
 - 5,Sputum suction
 - 6,Oxgen inhaling
 - 7,Oral and nasal feeding
 - 8.gastrolavage
 - 9, Main organs in the thoracic cavity
 - 10, Venipuncture,injection,blood transfusion(ARM)
 - 11, Deltoid subcutaneous injection
 - 12, Vastus lateralis injection
 - 13,Thoracic cavity,abdominal cavity,liver,bone marrow and lumbar puncture
 - 14,Enema
 - 15,Female urethral catheterization
 - 16, Male urethral catheterization
 - 17,Female bladder irrigation
 - 18,Male bladder irrigation
 - 19,Ostomy
 - 20,Buttocks intramuscular injection
 - 21,Main organ in the abdominal wall
 - 22, Holistic nursing:sponge bath,replacing clothes
 - 23, Tracheotomy care
- Package:
- Size:127X48X22cm
- G.W.:16.2kgs



SHM1107 Skull Model

Mounted on a base
Material:Advanced PVC
Packing size:22x16x23.5cm
G.w.:1 kg
Size:85cm
Material:imported PVC
Packing size:19x19x26cm
G.W.:1.3kg

Dual-sex Torso-27 Parts Basic Nursing Manikin

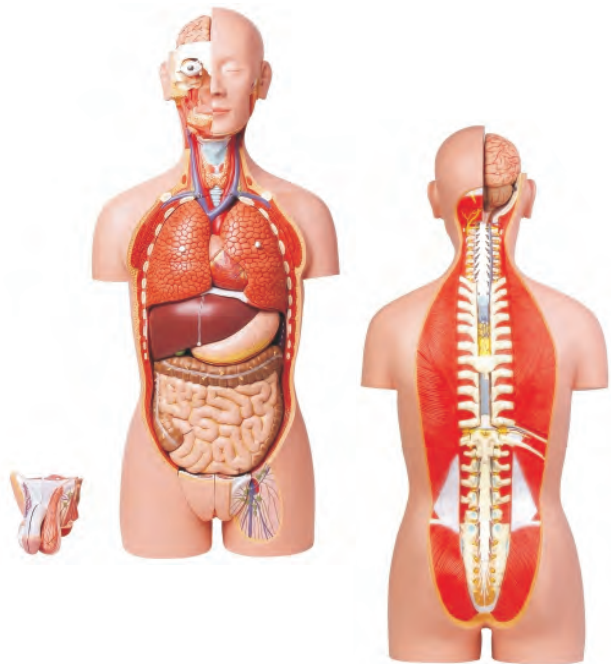

SHM1108
Dual-sex Torso-27 Parts


Size:85cm
Material:PVC

SHM1109 Basic Nursing Manikin

- Features:
- 1,Oxgen inhalation
 - 2,Nasal feeding
 - 3,Gastrolavage
 - 4,Duodenal drainage
 - 5,Esophageal and gastric balloon
 - 6,Deltoid subcutaneous injection
 - 7,Subcutaneous puncture
 - 8,Venipuncture,injection,blood transfusion(ARM)
 - 9,Male/female urethral catheterization
 - 11,Gauze drainage can be practiced in the fistula of wound.



Median Section of Male (Female)Pelvis Model

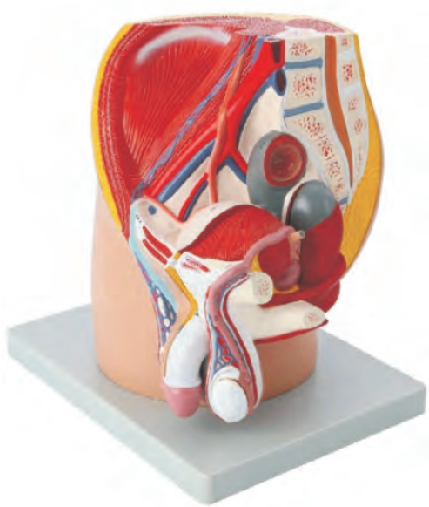


SHM1110
Median Section of Male Pelvis Model

Size:life size, 4parts
Material:PVC

SHM1111 Median Section of Female Pelvis Model

Size:life size, 4parts
Material:PVC

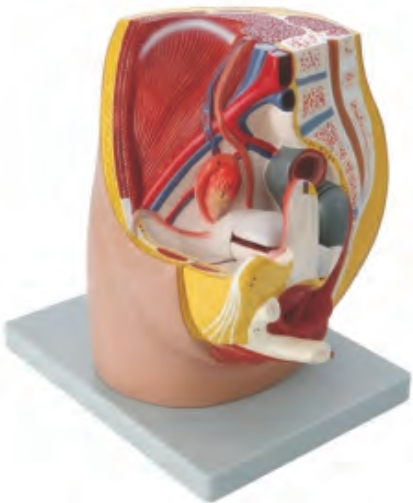

SHM1112 Eyes Model-6parts

Size:3times magnified,6parts
Material:PVC

